# HydroTap G5 BHA60 3-in-1 Classic tap with Classic Mixer Chrome

Boiling

**Finish:** Chrome

**Product code**: H51656Z00AU

**Capacity**: Commercial

Zip HydroTap Classic 3 in 1 Boiling, Filtered water plus Hot and Cold washing up water from two separate taps. The system features a single under bench command centre including full colour interactive touch screen display with pin code protection and customisable settings including 2 boiling water safety modes, 3 energy saving modes including ON/OFF timers and sensor activated 'sleep when it's dark', 'Quiet' mode with automated intelligent fan speed adjustment, antimicrobial protection impregnated into key water paths for enhanced hygiene, 100% water efficient air cooled technology, and 0.2 micron water filtration.

# Specifications

| | |
|---|---|
| **Product name** | HydroTap G5 BHA60 3-in-1 Classic tap with Classic Mixer Chrome |
| **Product code** | H51656Z00AU |
| **Filtered water type** | BHA |
| **Product approvals** | WaterMark, RCM |
| **Wels rating** | 6 Star, 3.0 litres |
| **Warranty** | 5 years (appliance warranty 36 months plus additional 24 months tank warranty) |

# Capacity, weight & dimensions

| | |
|---|---|
| **Number of people** | 41-60 |
| **Boiling cups per hour** | 160 |

# Plumbing

| | |
|---|---|
| **Water supply requirements** | Cold |
| **Water connection** | 1/2" BSP (G1/2) |
| **Water valves** | Integrated 500kPa Pressure limiting valve and Dual Check Valve |
| **Water pressure** | Min 300kPa - Max 700kPa |

# Electrical

| | |
|---|---|
| **Power rating** | 1.8kW 220-240V 50Hz |
| **Power supply** | 1 × 10 Amp socket outlet |

# Tap design

| | |
|---|---|
| **Tap** | Zip HydroTap CLASSIC Tap (Chrome) |
| **HydroTap style** | Classic |
| **Mixer tap style** | Classic |
| **Finish** | Chrome |
| **Disability options** | no |

# Command centre

| | |
|---|---|
| **Dimensions** | W280mm x D313mm x H333mm |

# Installation

## Installation requirements

1. Installation and connection of your Zip HydroTap must be carried out by a Zip Certified service technician, observing national and local regulations.

2. You will require suitable mains electrical and drinking water connections, plus waste water drainage all within 1 metre of the product.

3. Zip HydroTap is air-cooled so discrete cabinetry cut-outs are required for ventilation.

4. Installation on most bench tops is straightforward however some stone bench tops may require a specialised cutting service.

5. Installation by Zip Professional Service can be arranged with a phone call or through www.zipwater.com/book-service-visit

## Files

Installation Layout 3D (DWG)

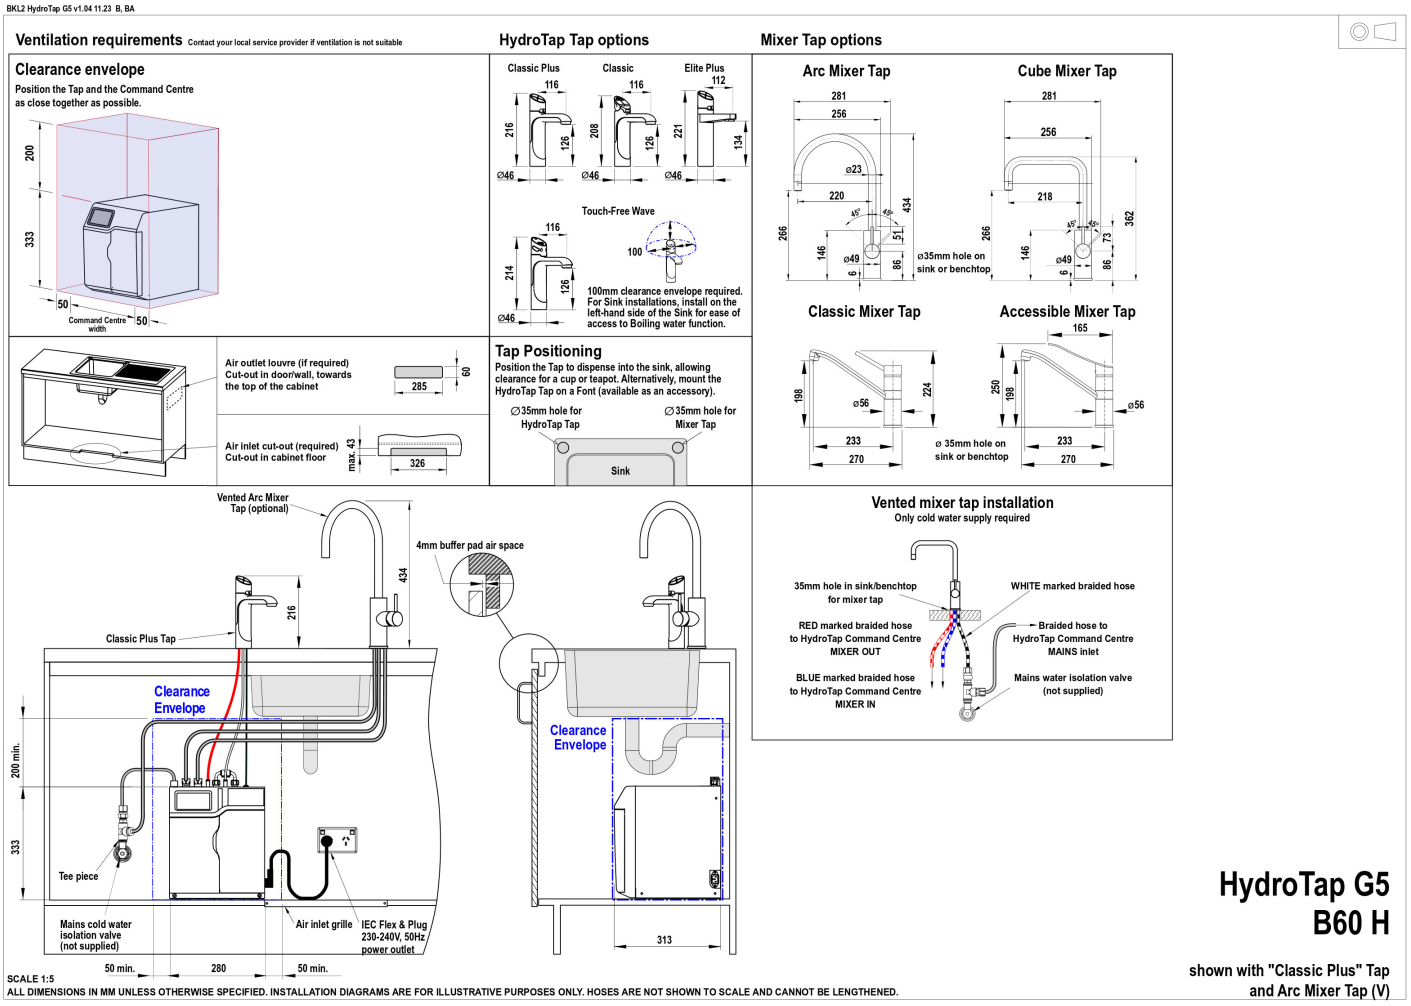


Installation Layout (PDF)

# BIM files

LCF

ArchiCAD Swift Globals Library (LCF)

LCF

ArchiCAD Zip Water Library (LCF)

RFA

Revit Project File (RFA)

RVT

Revit Virtual Showroom (RVT)

Download all

# Certifications

WORKS WITH WELL

Environment ISO 14001

EPD INTERNATIONAL EPD SYSTEM

OHS ISO 45001

Quality ISO 9001

Lead Free

WATER RATING www.waterrating.gov.au 3.0 litres per minute Licence No. 0086

PDF

Environment ISO (PDF)

PDF

Environmental Product Declaration Brochure (PDF)

PDF

Filter performance (PDF)

PDF

Health & Safety (PDF)

PDF

Quality ISO (PDF)

# Manuals & brochures

Brochure (PDF)

Instruction manual (PDF)

Quick guide (PDF)

Tap operation label (PDF)

User manual (PDF)

Download all