



## HydroTap G5 BCSHA100 5-in-1 Touch-Free Wave tap with Classic Mixer Chrome

Boiling Chilled Sparkling

 **Finish:** Chrome

**Product code:** H5W676Z00AU

**Capacity:** Commercial

Zip HydroTap Touch-Free Wave 5 in 1 Boiling, Chilled, Sparkling, Filtered water plus Hot and Cold washing up water from two separate taps. The system uses smart infrared 100% touch-free operation that is activated with the Wave of a hand. The water system features a single under bench command centre including full colour interactive touch screen display with pin code protection and customisable settings including boiling water safety mode, 2 energy saving modes including ON/OFF timers and 2 hour sleep mode, 'Quiet' mode with automated intelligent fan speed adjustment, antimicrobial protection impregnated into key water paths for enhanced hygiene, 100% water efficient air cooled technology, 0.2 micron water filtration, and a refillable CO2 cylinder. Easy to install integrated ventilation tray included.

# Specifications

|                     |                                                                                |
|---------------------|--------------------------------------------------------------------------------|
| Product name        | HydroTap G5 BCSHA100 5-in-1 Touch-Free Wave tap with Classic Mixer Chrome      |
| Product code        | H5W676Z00AU                                                                    |
| Filtered water type | BCSHA                                                                          |
| Product approvals   | WaterMark, RCM, ARC                                                            |
| Wels rating         | 6 Star, 3.0 litres                                                             |
| Warranty            | 5 years (appliance warranty 36 months plus additional 24 months tank warranty) |
| Chilling Technology | Air cooled technology making it 100% water efficient                           |

# Capacity, weight & dimensions

|                                              |        |
|----------------------------------------------|--------|
| Number of people                             | 61-100 |
| Boiling cups per hour                        | 240    |
| Chilled cups per hour                        | 175    |
| Combined chilled and sparkling cups per hour | 175    |

# Plumbing

|                           |                                                                |
|---------------------------|----------------------------------------------------------------|
| Water supply requirements | Cold                                                           |
| Water connection          | 1/2" BSP (G1/2)                                                |
| Water valves              | Integrated 500kPa Pressure limiting valve and Dual Check Valve |
| Water pressure            | Min 300kPa - Max 700kPa                                        |

# Electrical

|                      |                                             |
|----------------------|---------------------------------------------|
| Power rating         | 2.15kW 220-240V 50Hz                        |
| Power supply         | 2 × 10 Amp socket outlets                   |
| Booster power rating | Zip HydroTap Booster 2.2kW 220-240V 50/60Hz |

# Tap design

|                 |                                           |
|-----------------|-------------------------------------------|
| Tap             | Zip HydroTap Touch-Free Wave tap (Chrome) |
| HydroTap style  | Touch-Free Wave                           |
| Mixer tap style | Classic                                   |
| Finish          | Chrome                                    |

# Command centre

|            |                          |
|------------|--------------------------|
| Dimensions | W395mm x D487mm x H333mm |
|------------|--------------------------|

# Installation


## Installation requirements

1. Installation and connection of your Zip HydroTap must be carried out by a qualified person, observing national and local regulations.
2. You will require suitable mains electrical and drinking water connections, plus waste water drainage. The HydroTap must be installed to within the limits of the hose and cable lengths supplied.
3. **Discrete cabinetry cut outs are required for airflow. 40mm minimum clearance on cupboard base overhang required otherwise alternative installation options are available.**
4. Installation on most bench tops is straightforward however some stone bench tops may require a specialised cutting service.
5. Installation by Zip Professional Service can be arranged with a phone call or through [www.zipwater.com/book-service-visit](http://www.zipwater.com/book-service-visit)

## Files

Installation Layout 3D (DWG)

BKL2 HydroTap G5 v1.2 01.2025 BCS60 BCS100

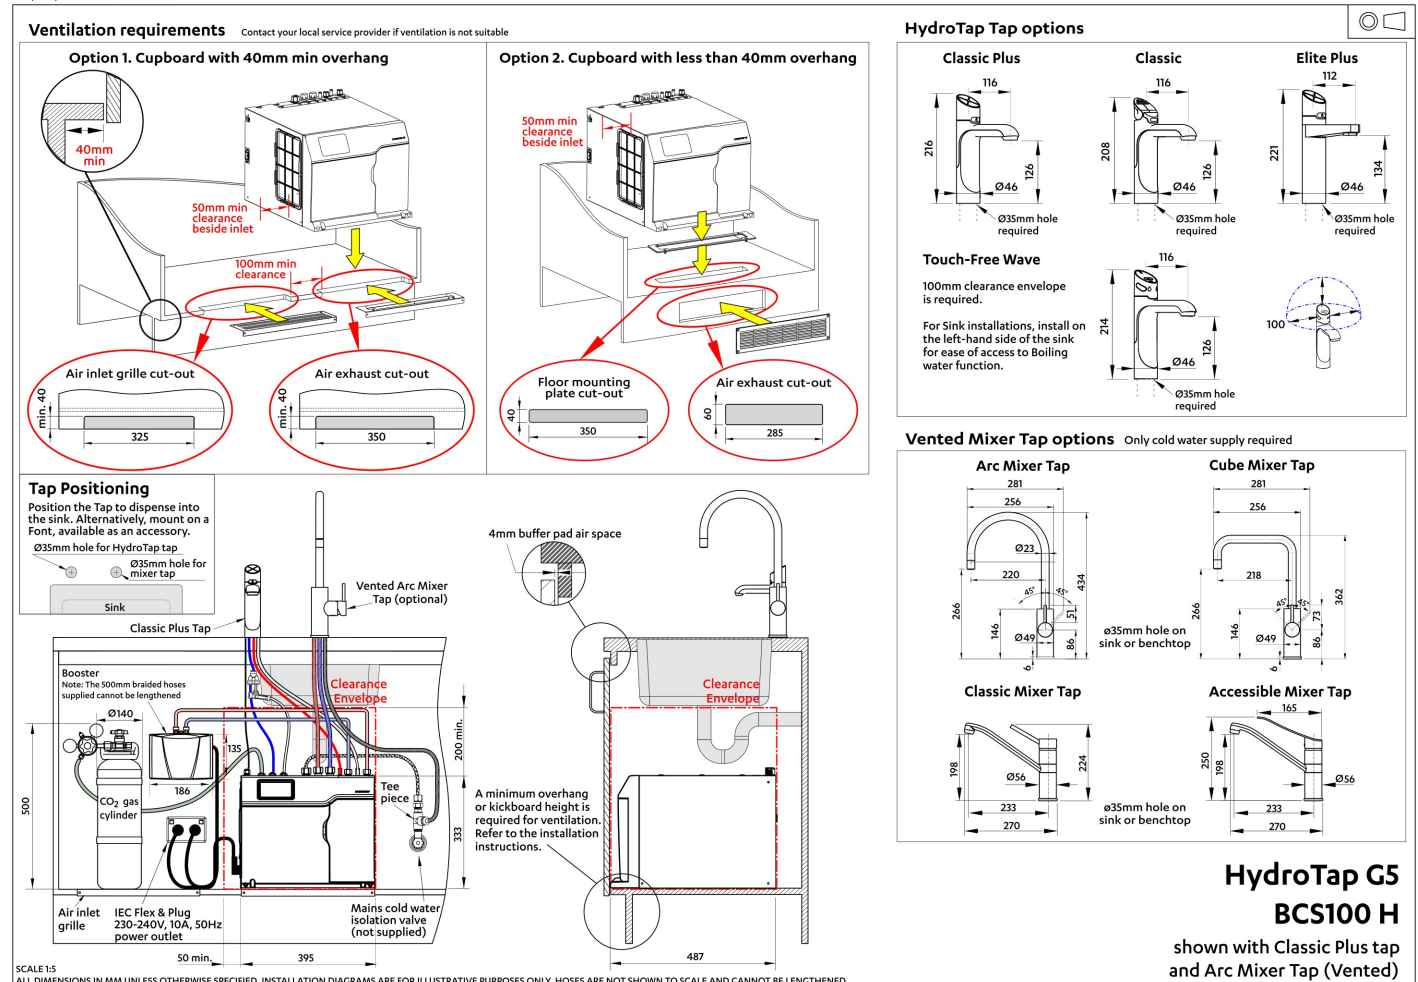

Installation Layout (PDF)

# BIM files



↓ ArchiCAD Swift  
Globals Library  
(LCF)



↓ ArchiCAD Zip Water  
Library (LCF)



↓ Revit Project File  
(RFA)



↓ Revit Virtual  
Showroom (RVT)

↓ Download all

# Certifications



OHS  
ISO 45001



Quality  
ISO 9001



↓ ARC (PDF)



↓ Environment ISO  
(PDF)



↓ Environmental  
Product Declaration  
Brochure (PDF)



↓ Filter performance  
(PDF)



↓ Health & Safety  
(PDF)



↓ HydroTap Clean  
SDS (PDF)



↓ Quality ISO (PDF)

# Manuals & brochures



↓ Brochure (PDF)



↓ CO<sub>2</sub> MSDS (PDF)



↓ Instruction manual (PDF)



↓ Quick guide (PDF)



↓ Tap operation label (PDF)



↓ User manual (PDF)

↓ Download all