Two Glass Swing Door CounterLine

Range: BackBar
SKOPE ID: CL002
Dimensions: 1580mm (W) × 680mm (D) × 830mm (H)*
Capacity: 345L

* Height with castors is adjustable from 820 to 835.

Project:

Item #:

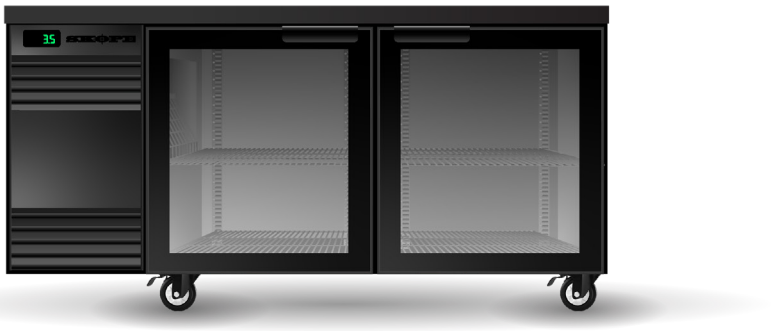

A glass door under-counter bar fridge designed to merchandise ready-to-serve cold beverages in bars, restaurants, clubs, pubs, and cafés. Engineered to serve cold drinks at 1°C to 4°C (or adjustable up to 15°C) in ambient environments of up to 40°C. Made from powder-coated, galvanised steel with colour options, it can also be upgraded to full stainless-steel construction. The 'frameless' glass doors provide maximum product viewing and are designed for condensation protection in most environments via the double-glazed, argon-filled low-e insulated panels and heated fascia. For high humidity tropical environments heated glass versions are available. The doors and cabinet are fitted with built-in retractable tabs to enable locking via padlock. The built-in LED lights provide optimum merchandising and can be dimmed or timed to turn on and off via a free smartphone app. The fridge uses R290 natural refrigerant for ultra-low energy consumption, low heat discharge and low noise output and can be provided in Remote versions. The side-mounted fully removable refrigeration cartridge (with left and right options) is front-breathing and can be removed in line with best practice for safe servicing of flammable refrigerants. The fridge includes a controller that connects to a free app to enable the user to set temperatures and alerts, monitor temperatures and energy, and more. The fridge is certified to all Australian and New Zealand refrigeration and electrical safety standards.

Warranty

Natural Refrigerant

GEMS

SKOPE-connect

© 2022 SKOPE Industries Limited | We reserve the right to alter specifications without notice.

Email: skope@skope.com AUS Freephone: 1800 121 535 NZ Freephone: 0800 947 5673 skope.com

CL.2.GSW

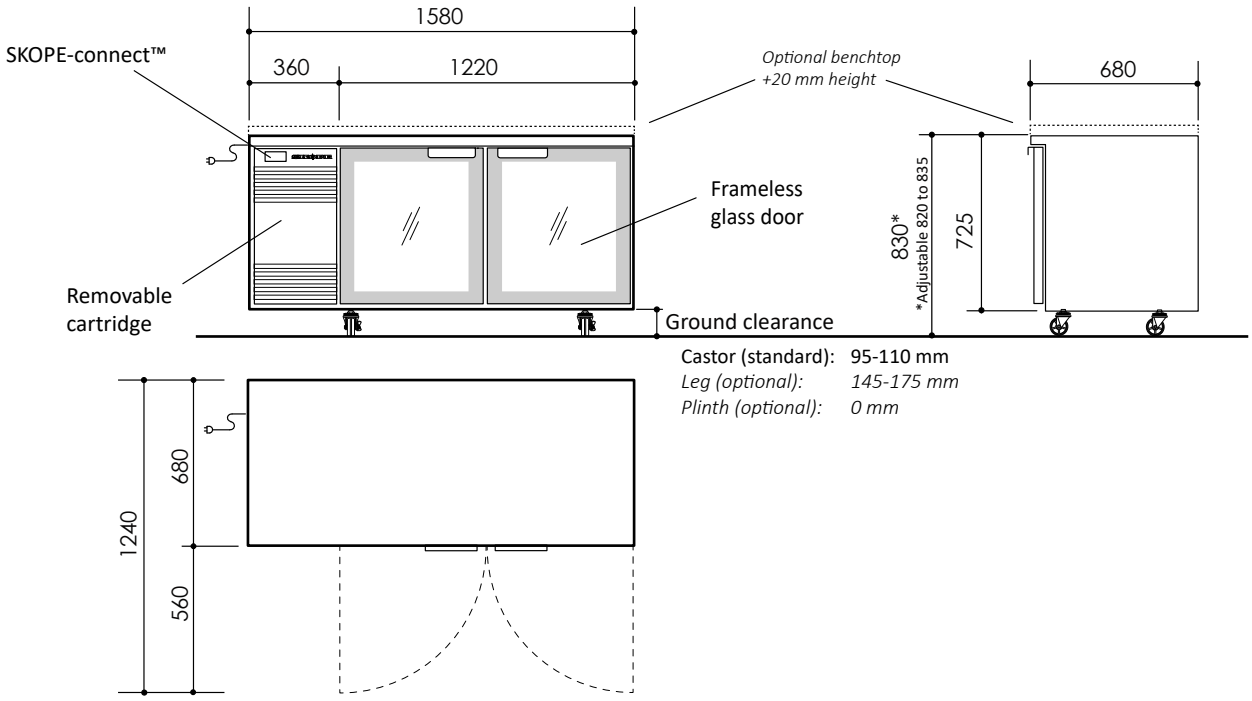

Cabinet

Type	CounterLine	
Finish	Powdercoat galvanised steel or stainless steel	
Insulation	Type	PU foam
	Thickness (mm)	50
	Blowing Agent	Cyclo.iso Pentane (C5H10/C5H12)
Doors	Type	Glass Swing door (double-glazed, low-e, argon-filled)
	Opening Size	Height (mm) 538
		Width (mm) 511
Shelving	Four adjustable height, plastic-coated wire shelves 4 × outer shelf (547W × 530L)	
Lighting*	1 × 16 W dimmable, cool white (5500-6500K) LED strip on cabinet ceiling	

Dimensions†

	External	Internal	Packed
Width (mm)	1580	1120	TBC
Depth (mm)	680	565	TBC
Height (mm)	**830 (std. castors)** 725 (plinth mount)	545	TBC
Weight (kg)	168		TBC
Capacity (L)	345		
Footprint (m^2)	1.07		

Ventilation (mm)

Top	Not required	**Sides**	Not required	**Rear**	Not required

Product Loading

Facing	330ml can	32	600ml bottle	28
Loading	330ml can	256	600ml bottle	196

Performance

Product Temperature Range (°C)	1 to 4 (adjustable* from 0 to 15)	
Rated Ambient Temperature	32°C/65% relative humidity	
Maximum Ambient Temperature (°C)	40	
Sound Level (dB(A))	Standard	Less than 66
	Hush Mode*	Less than 62

Greenhouse and Energy Minimum Standards (GEMS)

Star Rating	9
Product Temperature Class	M1 (.1 to 5°C)
Total Energy Consumption	1.87 kWh/24h
Annual Running Costs	$205 (@ $0.30/kWh)

Electrical

Supply	220-240 volts a.c., 50 Hz, single phase supply
Cord	1.9 m power cord with 3-pin, 10 amp plug
Current draw (A)	2.6

Refrigeration

Controller	SCS Connect (SKOPE-connect™ compatible)			
System Type	Removable cartridge			
Cartridge Weight (kg)	24			
Refrigerant/Charge	R290/81g			
Nominal Capacity (W)	650			
Heat Rejection (W)	Average	80	Peak	100
Remote Duty	n.a.			
Defrost Type	Off-cycle			
Drainage	No plumbing required			

* Accessible via the free SKOPE-connect™ app.

† Allow for dimensional tolerances when installing the cabinet(s).

CL.2.GSW
on the SKOPE website

© 2022 SKOPE Industries Limited | We reserve the right to alter specifications without notice.

Email: skope@skope.com AUS Freephone: 1800 121 535 NZ Freephone: 0800 947 5673

skope.com

PSS0989 | Rev. 1.2 Mar. 2022