

6210-C / 6210A-C

SOFT SERVE FREEZER

Single Flavor, Countertop, Digital Control
A: Pump Feed Model



Most **Compact & Versatile**
single flavor countertop model
with pump feed option for soft
ice cream & frozen yogurt

Fast Freeze Down

Patented high efficiency heat exchanger allows fast freeze down with low energy consumption

Digital Control and Display

Digital control provides access to system settings and displays critical system information

Auto Programming

Allows automatic switching of operation modes based on preset schedules

Standby

Maintains product temperature in both mix hopper and freezing cylinder below 4.4°C (40°F) overnight

Hopper Agitator (optional)

Maintain product consistency and prevent product separation

Ideal for any business with limited counter space to add ice cream, frozen yogurt, gelato or sorbet. Flexible with digital control and display. Great fit for restaurants, bars, kitchens, convenience stores and delis.

Soft System Start

Slow motor start reduces equipment noise and stress on drive train

Direct Drive Transmission

Eliminates consumable moving parts and increases transmission efficiency

Defrost for Cleaning

Increases efficiency during cleaning by heating frozen product in cylinder

Quick Freeze

Turn on freeze immediately to freeze down to serving viscosity when quick service is required after long idle period

Self-closing Valve with Speed Control

Automatically prevents product overflow after dispense; Provides flexibility in dispense rate control



Safety Protections

- Low temperature and motor overload shutoffs to protect in the event of cylinder freeze up
- High pressure switch to prevent compressor overheating



6210-C / 6210A-C

SOFT SERVE FREEZER

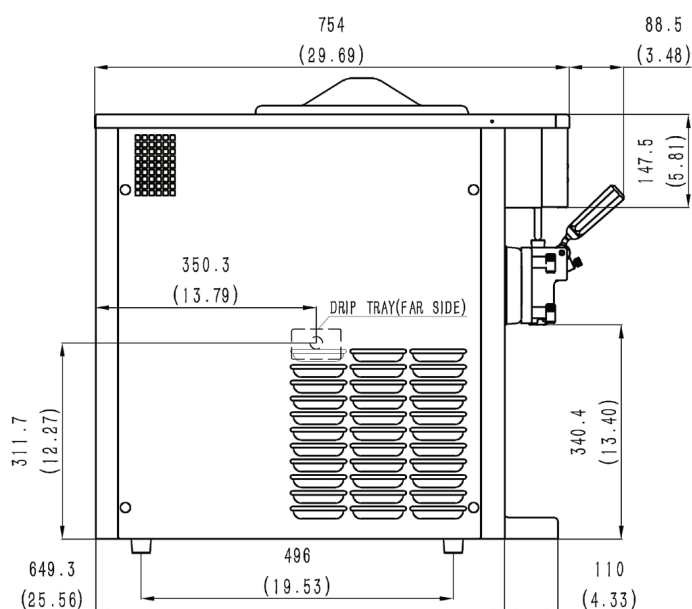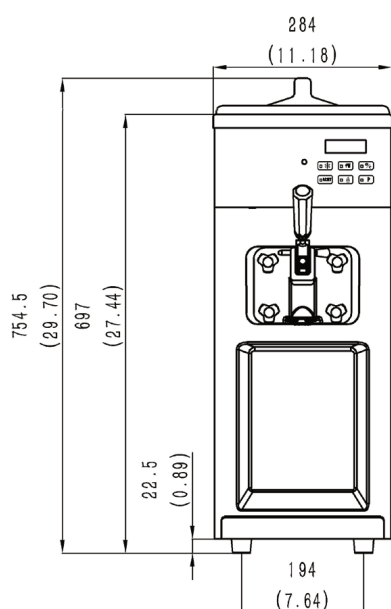

SPECIFICATIONS

Flavors	1
Freezing Cylinders	1 x 1.2L / 1.3qt
Mix Hoppers	1 x 8L (5L for A)
Output Capacity (80 grams)	150 serves/hr
Clearance Requirements	150mm/6" on back

Weight	Kg/lb (Gravity)	Kg/lb (Pump)
Net	90 / 198	100 / 220
Shipping Cylinders	102 / 225	112 / 247
Volume	0.27 CBM / 9.53 CBF	

Dimensions	Net (mm/in)	Shipping (mm/in)
Width	284 / 11.2	380 / 15.0
Depth	649 / 25.6	800 / 31.5
Height	755 / 29.7	900 / 35.4

Electrical	Fuse	Amp	Power(kW)
220-240/50/1	16	8	1.8
208-230/60/1	15	8	1.8

FEATURES

Control System	Single, Digital
Refrigerated Hopper	✓
Hopper Agitator (A only)	✓
Temperature Display	✓
Standby Mode	✓
Auto Closing Dispensing Valve	✓
Dispensing Speed Control	✓
Low Mix Indicator Light & Alarm	✓
Low Temperature Protection	✓
Motor Overload Protection	✓
High Pressure Protection	✓
Defrost & Quick Freeze	✓
Soft Start (not available on 110V)	✓
Direct Drive Pump (A only)	✓

AVAILABLE OPTIONS

Cart (Trolley)	✓
----------------	---

• Above specifications are subject to change without notice