



Ventilation requirements

Contact your local service provider if ventilation is not suitable

Option 1. Cupboard with 40mm min overhang


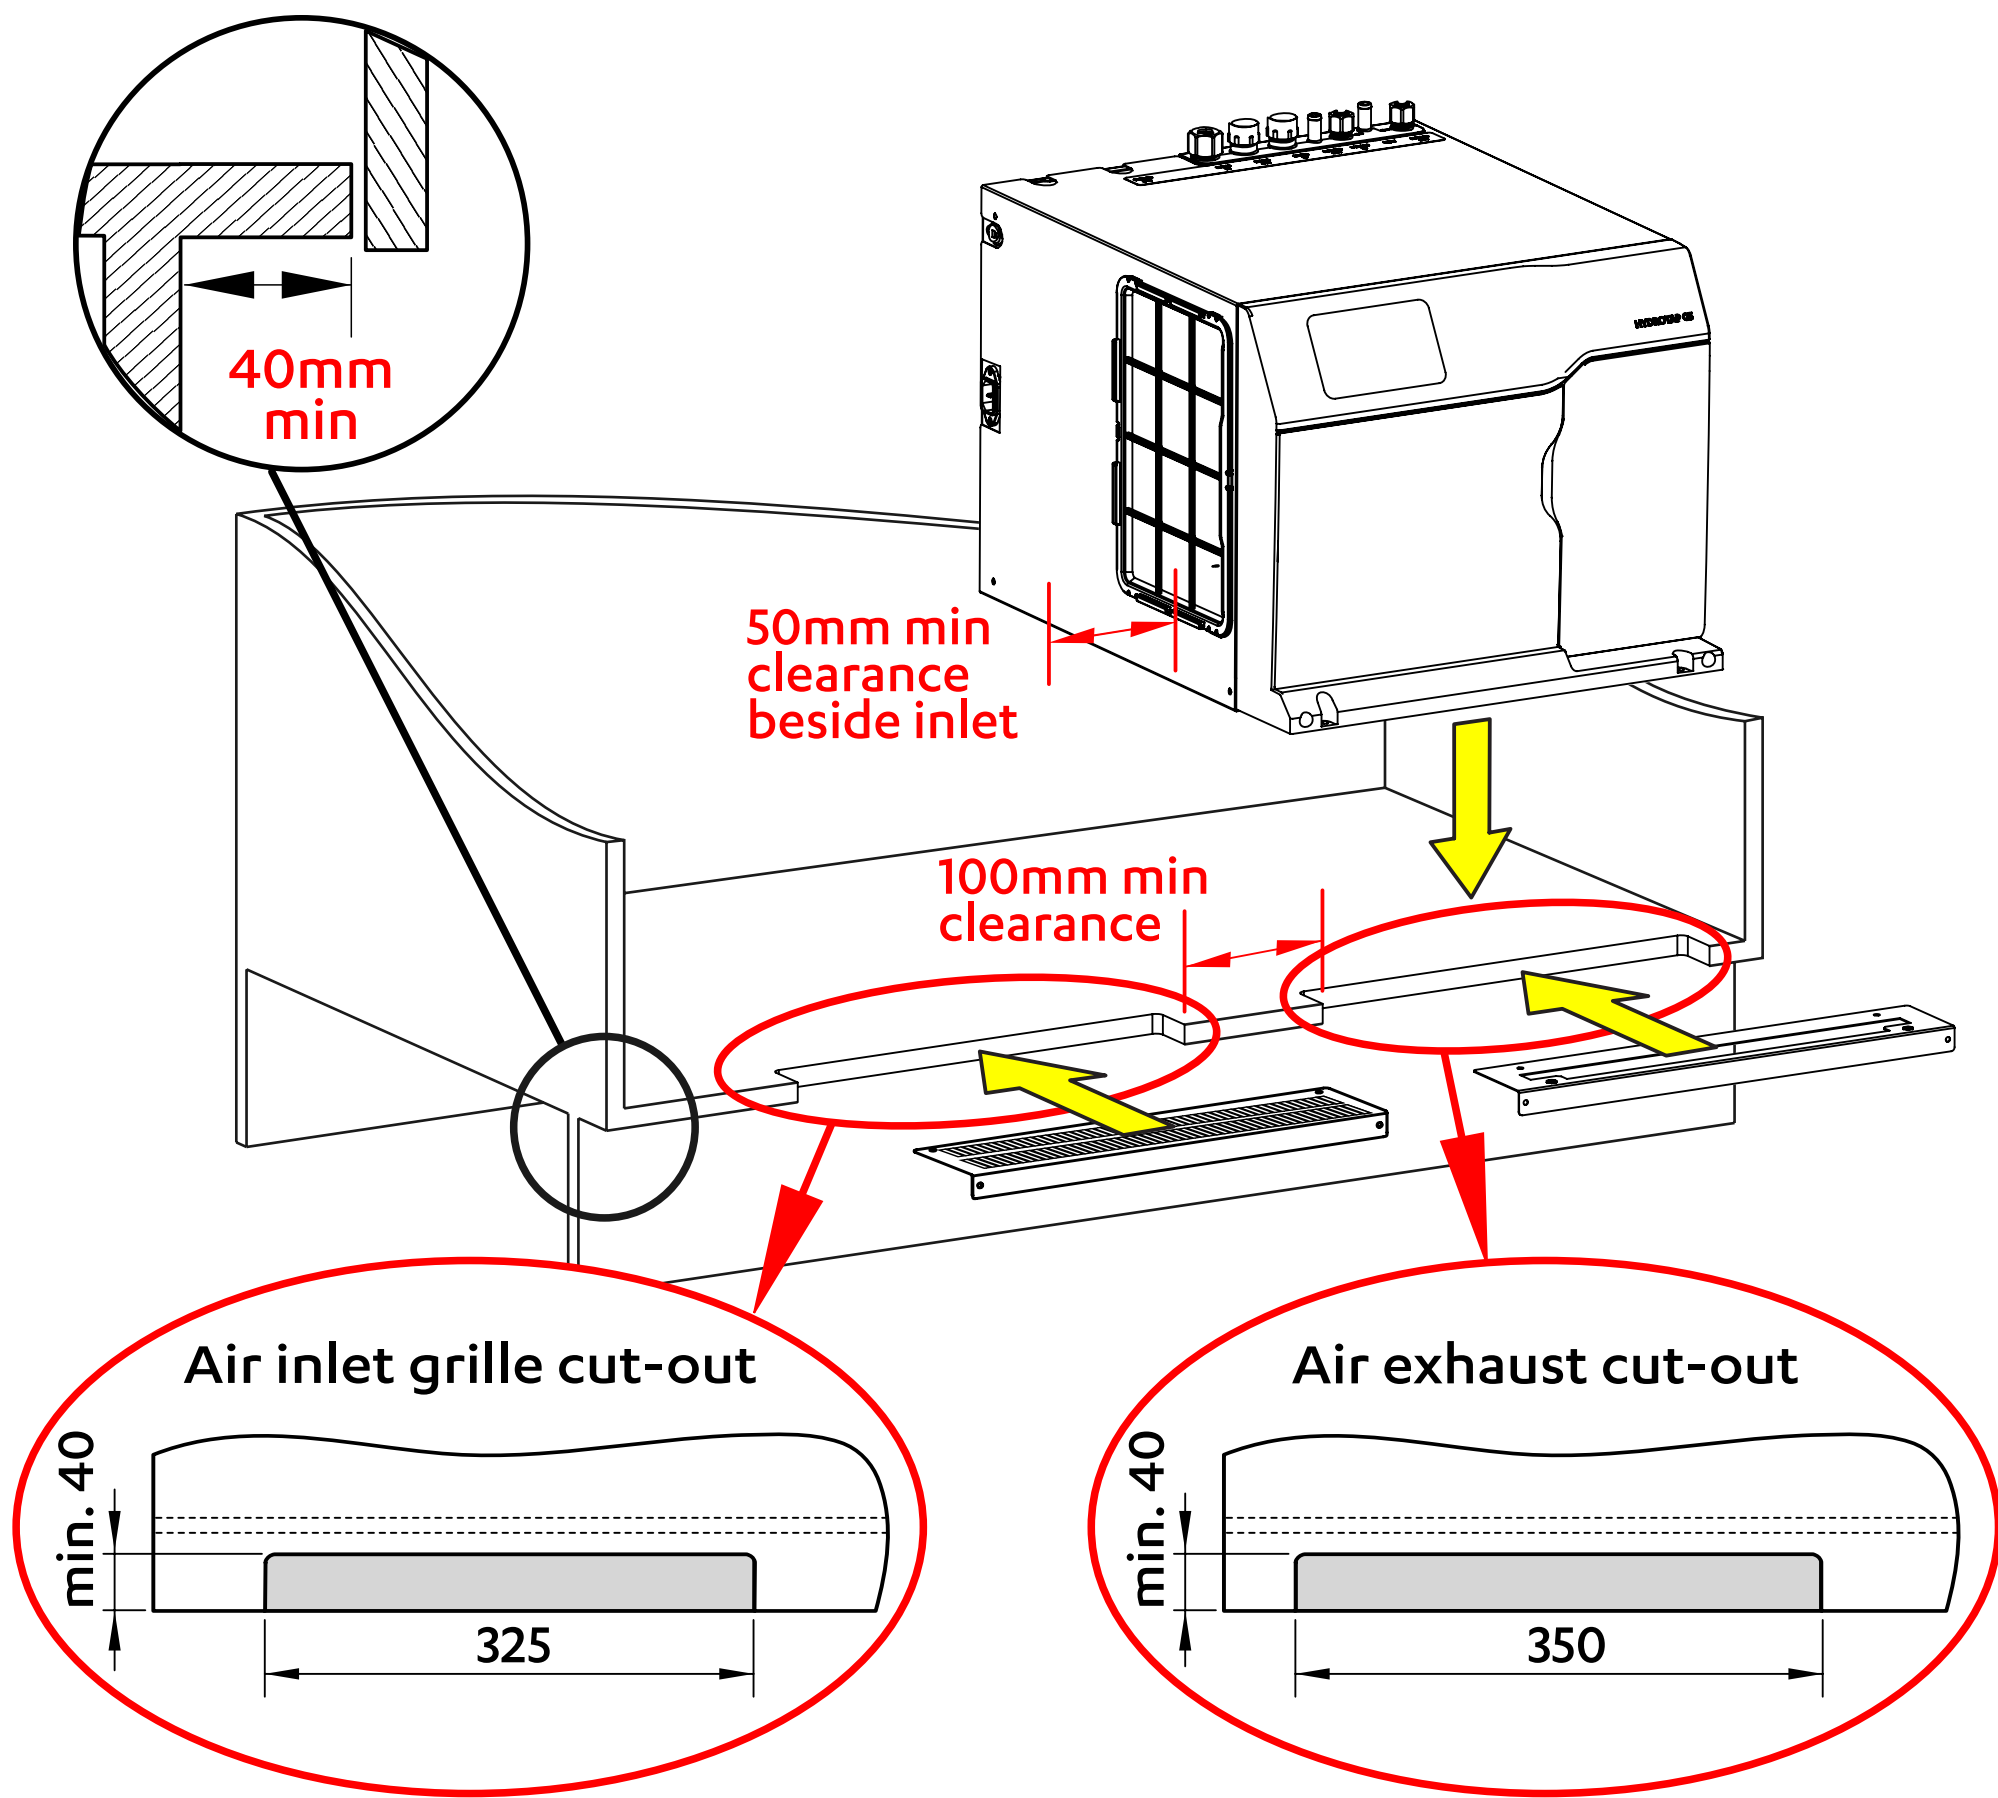


Option 2. Cupboard with less than 40mm overhang

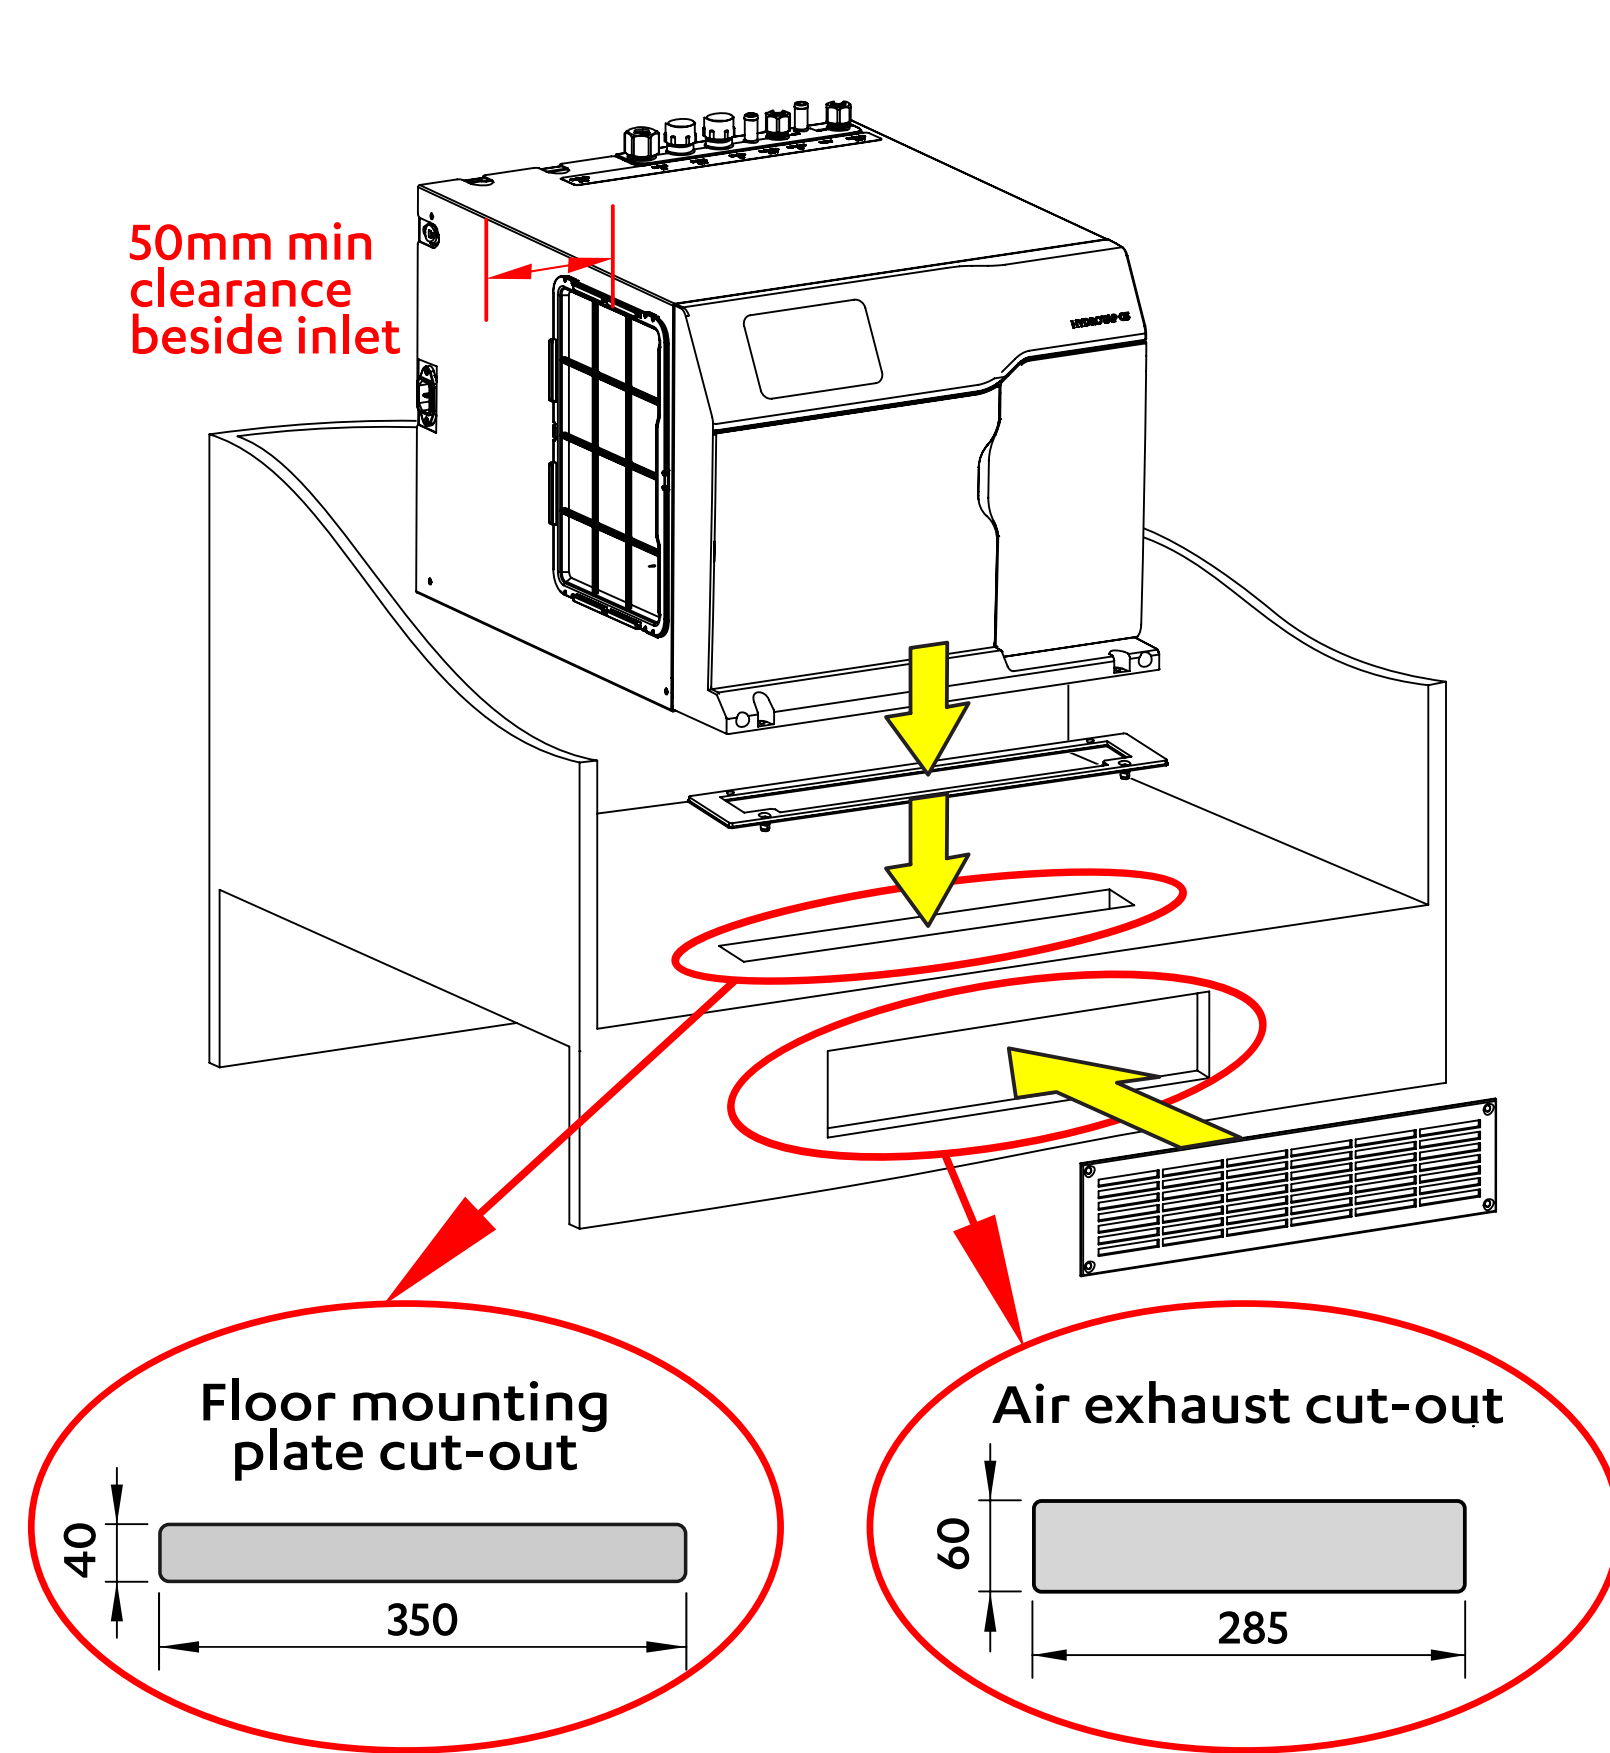


Tap Positioning

Position the Tap to dispense into the sink. Alternatively, mount on a Font, available as an accessory.

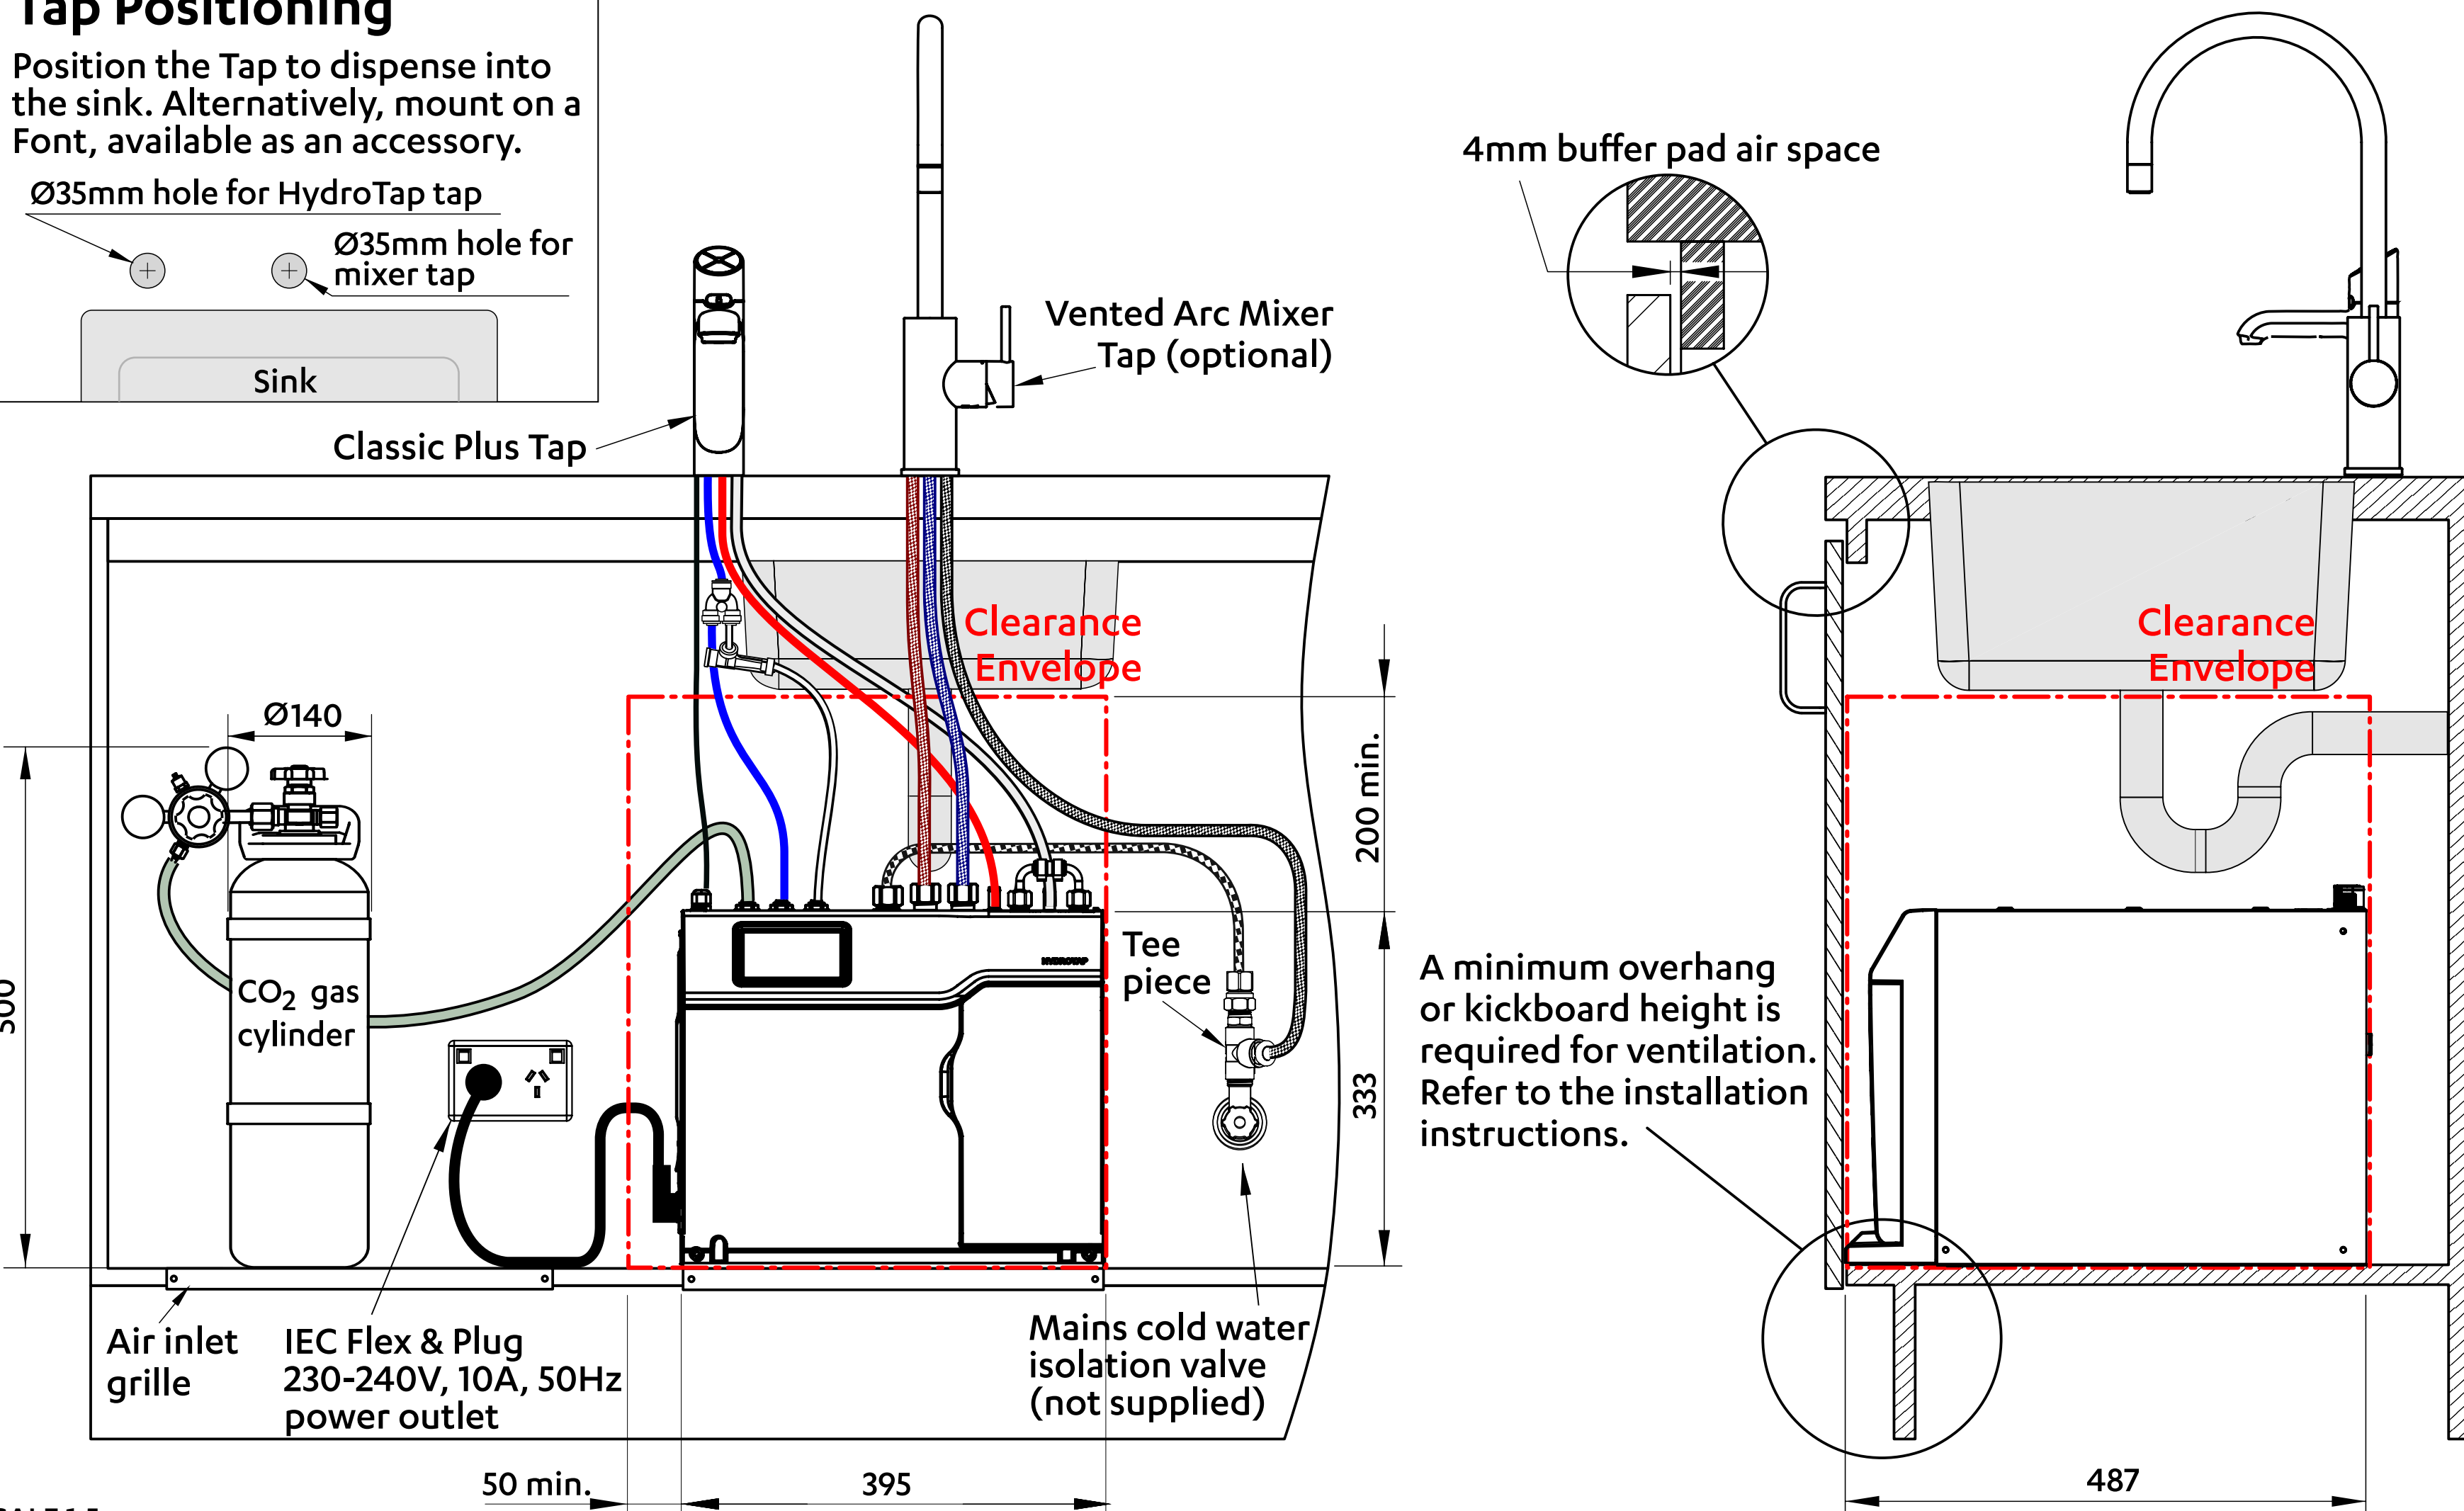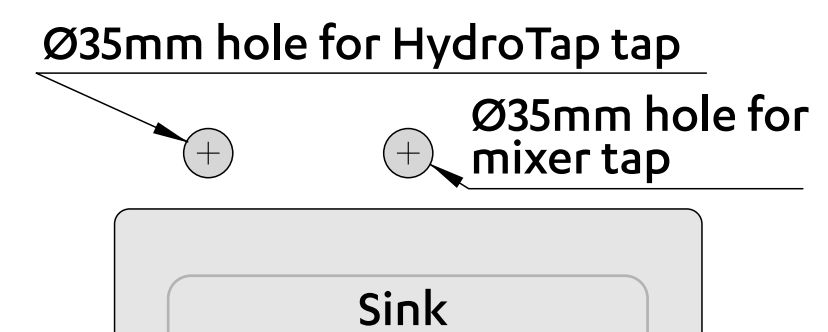


HydroTap Tap options


Classic Plus

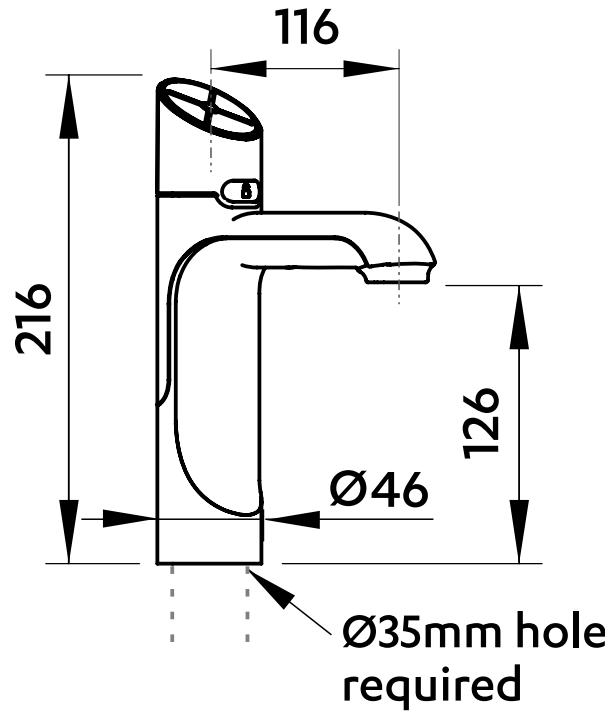

Classic

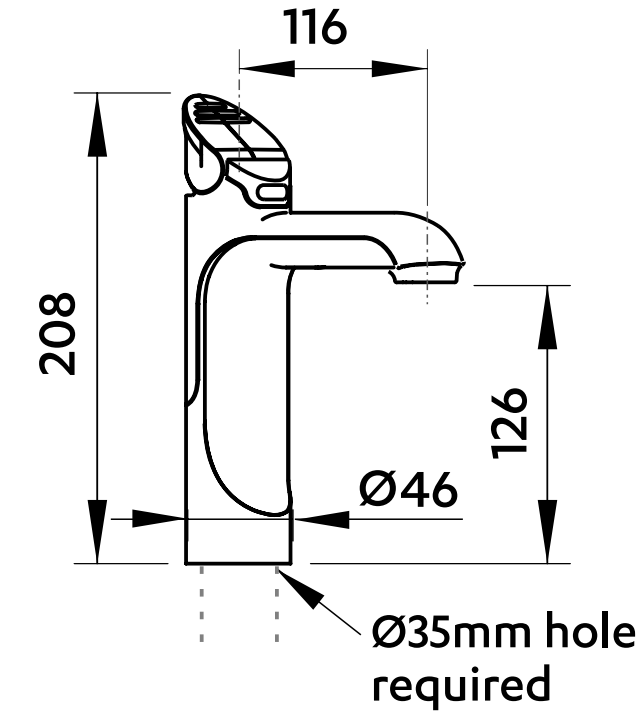



Elite Plus

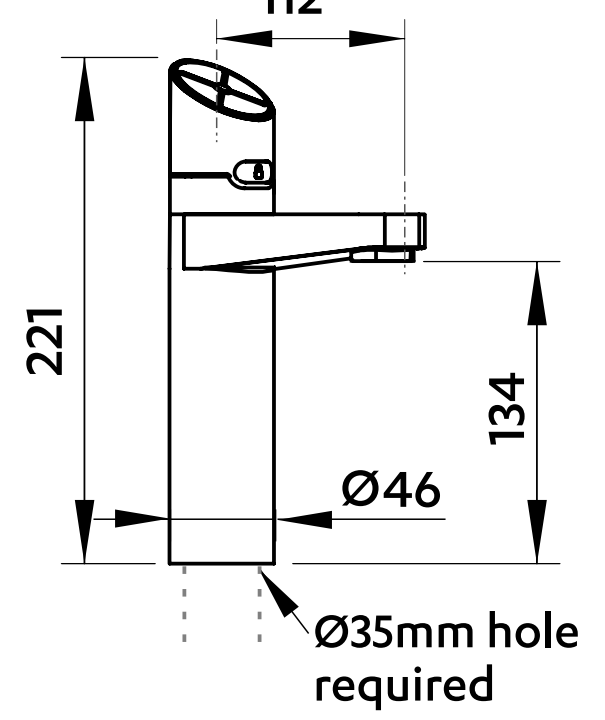

Touch-Free Wave


100mm clearance envelope is required.

For Sink installations, install on the left-hand side of the sink for ease of access to Boiling water function.

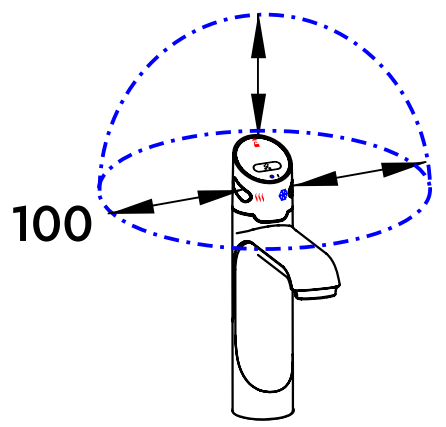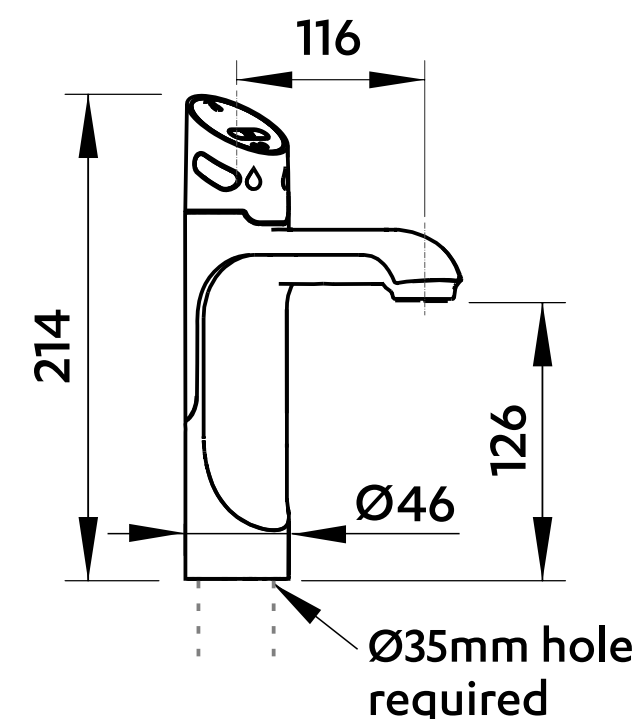


Vented Mixer Tap options Only cold water supply required


Arc Mixer Tap

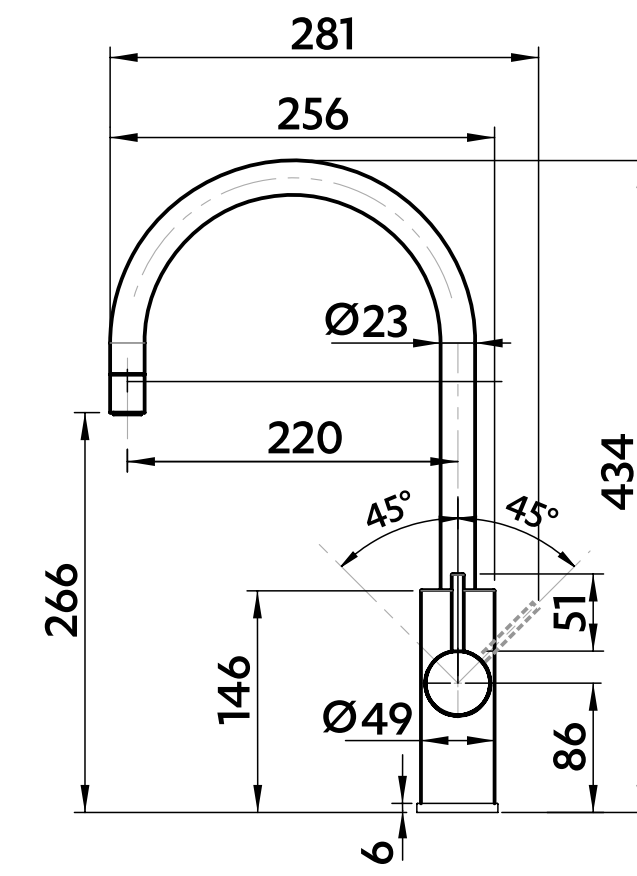


Cube Mixer Tap

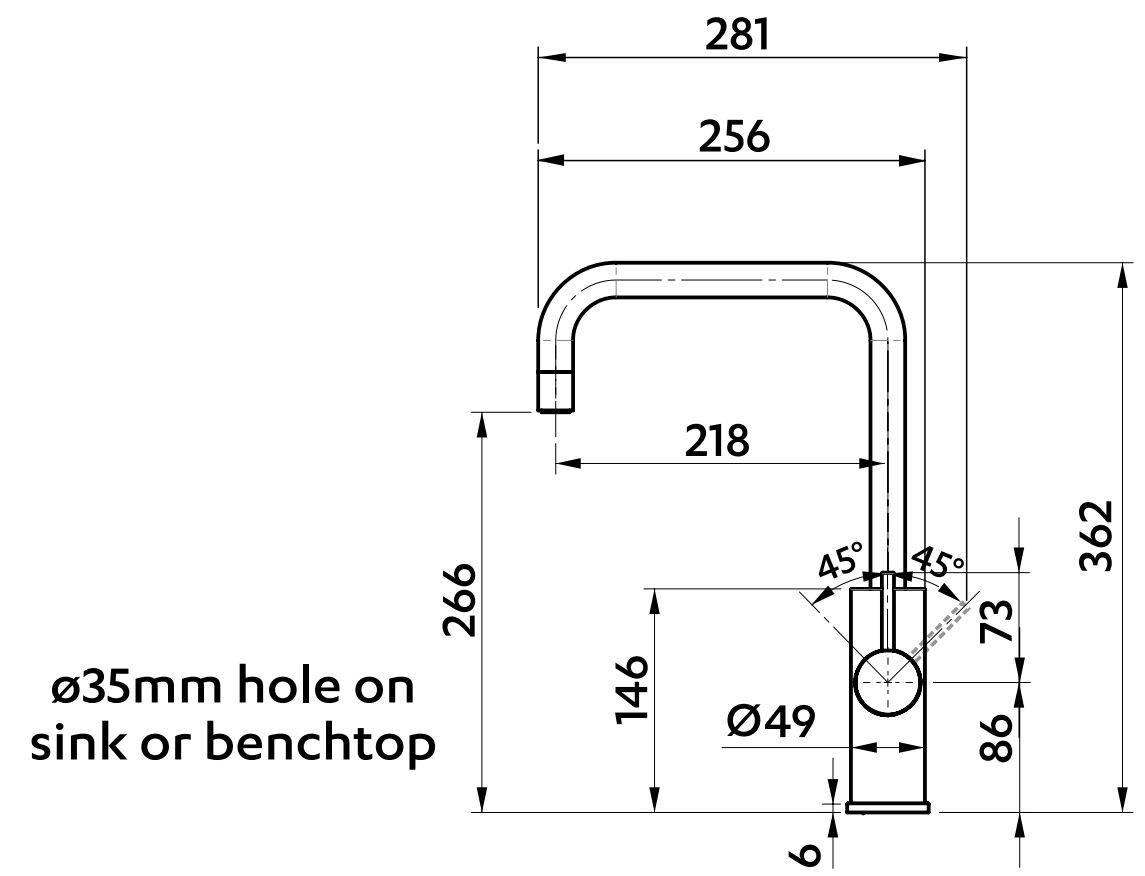

Classic Mixer Tap

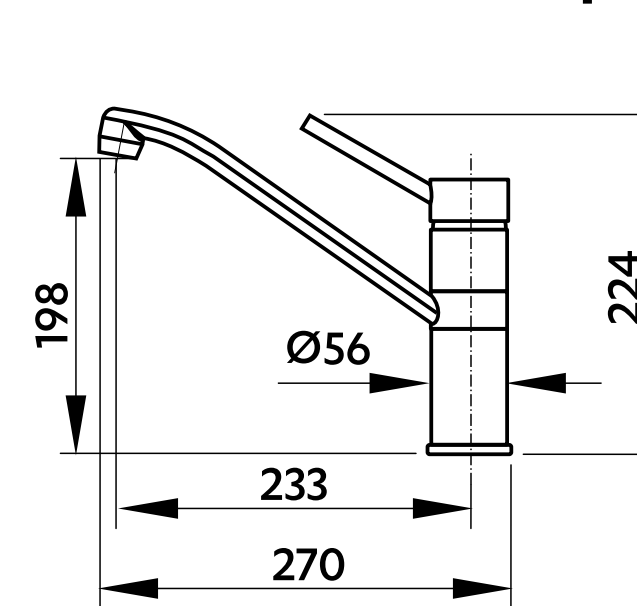

Accessible Mixer Tap

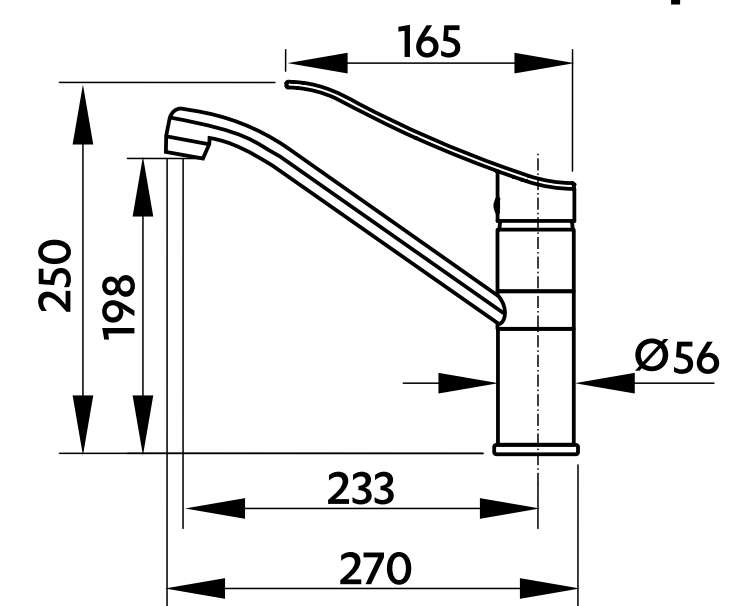

HydroTap G5 BCS60 H

shown with Classic Plus tap
and Arc Mixer Tap (Vented)