

M1 90 SERIES 800MM WIDE ELECTRIC PLANCHA WITH STAND



DIMENSIONS (mm)

800W X 920D X 900H

TECHNICAL DATA

Power Supply:	3NAC 400V 50Hz (Lead & Plug not included)
Electrical Power (kW):	16
Cooking Zones:	4
Cooking Zones Dimensions (mm):	690W X 665D
Temp. Range (°C):	50 – 350
IP Grade:	IPX5
Internal Base Unit Dimensions (mm):	720W X 900D x 400H

SHIPPING DATA

Net Weight (Kg):	95
Shipping Weight:	TBA
Shipping Dimensions:	TBA

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.


Freestanding electric hotplate on open cabinet base for direct and indirect cooking. 20/10 gauge worktop. Hotplate made of stainless steel with hardened chrome contact surface: maintains heat and reduces heat loss in the environment with considerable energy saving. Hotplate with radiused corners and bevelled upper edge, size of cooking area 690x665 mm, thickness 18 mm, flush with top. 4 independent cooking zones with 4 kW output, dimensions 345x330 mm. Thermostatic temperature control for direct cooking from 50 to 280°C, for indirect cooking from 50 to 350°C. Heating control knob shaped to prevent water infiltration, equipped with integral indicator light for instant recognition of heating and correct operation of the appliance. Indicator lights showing activation of heating and correct appliance operation. Different temperatures can be set for different heating zones, and pans can be shifted from one to another to obtain better cooking, while certain foods can be cooked directly on the cooking surface. Appliance equipped with a large perimeter channel, hole for fat run-off and a grease collection drawer. IPX5 water-resistant rating. Appliance equipped with stainless steel adjustable feet.

STANDARD FEATURES

- 2mm thick pressed stainless top
- IPX5 water protection
- Modular design
- Enhanced Mareno knob with indicator lights to inform user of machine operating status
- NEW interlocking device & seal supplied with all units
- Space at rear for connections

OPTIONAL FEATURES

- Cabinet Doors
- Castor kit

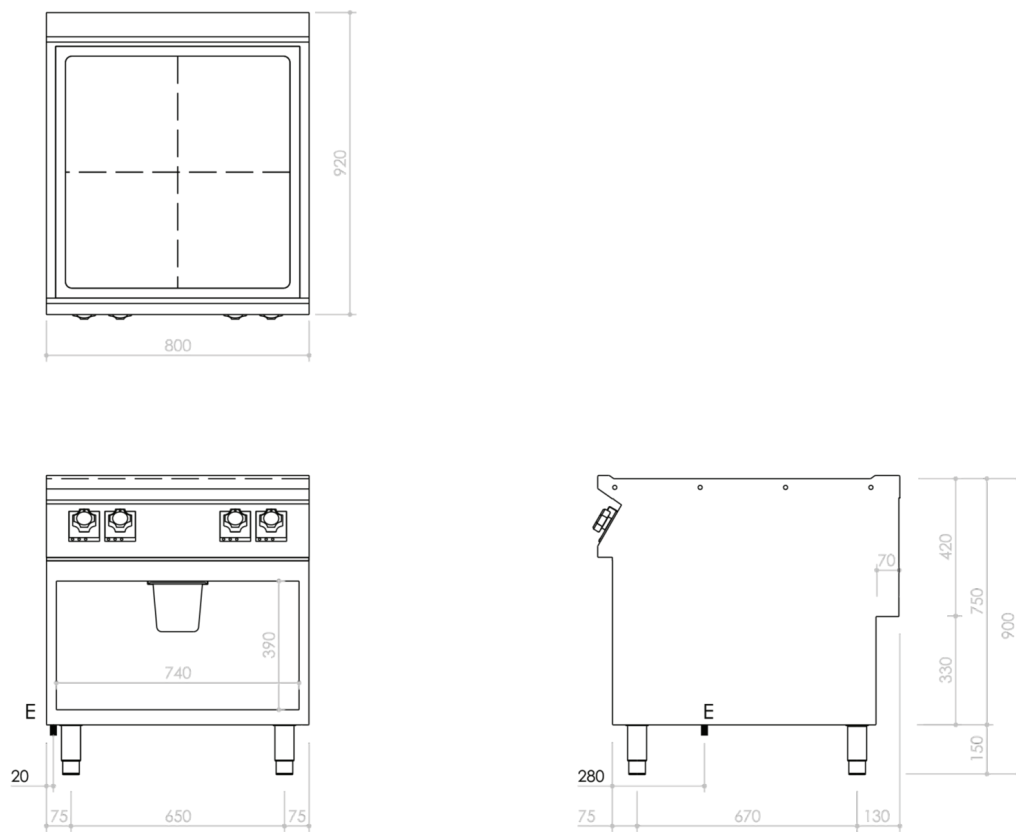

INSTALLATION SPECIFICATIONS

(E) Electrical Connection:

VAC400-3 50/60Hz