

The robust, stainless steel POLAR110-ACS vacuum packaging machine is standard equipped with a Busch vacuum pump.

STANDARD FEATURES

- Pump capacity: 160 m³/h Busch vacuum pump
- Standard with 2 seal bars (front & right): 1 x 1050 & 1 x 620 mm
- Optional without extra costs: 2 seal bars (left & right, front & back)
- Standard double seal (two wires)
- Silicone holders easily removable for cleaning and maintenance purposes
- Pump maintenance and cleaning program
- Machine cycle: 15-40 sec
- Soft Air to protect the product and vacuum bag
- Sensor control
- Flat work plate
- Advanced Control System (ACS) offering 20 personalised programs including:
 - Liquid Control (set and forget)
 - Marinating
 - Tenderising
 - Red Meat
 - Sequential Vacuum
 - Jar Sealing
- Insert plates included for a faster cycle and product adjustment
- Stainless steel exterior
- IP-65 Rating
- Service kit for standard maintenance included

OPTIONAL FEATURES

- Cut off seal
- Wide seal (10mm)
- Gas flush (incl. pressed air connection)
- Preparation for external pump
- Heating element for vacuum valve
- 3 seal bars (left-front-right)
- 1-2 Cut-off/Bi-active seal
- 100 or 300 m³/h Busch pump

ACCESSORIES

- Zebra ZD410 thermal label printer (only in combination with ACS models)
- Inclined insert plate (for vacuum packing liquids and powders)

DIMENSIONS

External Dimension: 1200W x 947D x 1150H mm

Chamber (usable space): 620W x 1050D x 280H mm

TECHNICAL DATA

Voltage (Hz): 3NAC 400V 50Hz


Pump Capacity (m³/h): 160

Power (kW): 4.0

Weight: 465kg

RCM Approved: 

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

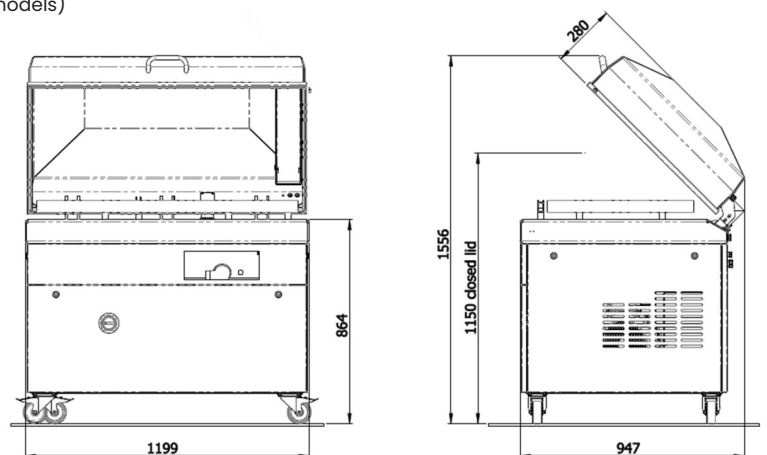

Busch vacuum pumps, world leaders in vacuum pump technology.



Two years parts & labour warranty