

Datasheets

Transport trolley model 6-2/1, 10-2/1 - Combi-Duo



Articlenumber

60.75.387

Description

The transport trolley allows mobile oven/plate racks to be loaded and unloaded into the cooking system and safely transported. Height-adjustable transport trolleys are suitable for cooking systems installed on work surfaces and elevated stands.




Intended use

This product is intended exclusively for professional use, such as in restaurant kitchens or catering operations for schools, hospitals, or delis. Any other use runs counter to its intended purpose, and could be dangerous. RATIONAL AG assumes no liability for consequences of improper use.

Features

- 2 levels to accommodate the mobile oven/plate racks
- Mechanism for securely locking the transport trolley with any Combi-Duo run-in rail
- Height-adjustable to adapt to the Combi-Duo installation
- 4 tandem castors (2 with parking brake - metal parts made from CNS)
- Handle for easy entry and exit of the mobile oven rack in and out of the cooking systems

Flexible height adjustment for Combi-Duo installations

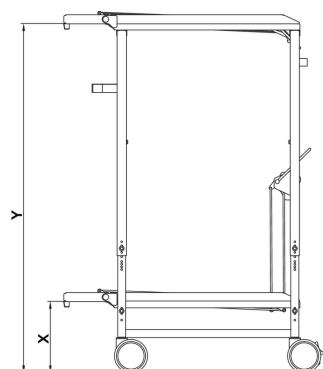

Table

		Bottom unit electric 6-2/1	Bottom unit electric 10-2/1	Top unit gaz unit 6-2/1	Top unit gaz unit 10-2/1
	lower plateau	upper plateau	upper plateau	upper plateau	upper plateau
	x	y	y	y	y
Floor installation	234 mm	1.018 mm	1.278 mm	1.142 mm	-
Levelling kit	268 mm	1.052 mm	1.312 mm	1.176 mm	-
Mobile Combi-Duo kit	320 mm	1.104 mm	1.364 mm	1.228 mm	1.488 mm
Base with feet	384 mm	1.168 mm	1.428 mm	1.292 mm	-
Stand I for Combi-Duo	434 mm	1.218 mm	1.478 mm	1.342 mm	-

Factory setting: Combi-Duo 6-2/1 on 10-2/1 Mobile Combi-Duo kit: lower plateau 320 mm, upper plateau 1.364 mm

Datasheets

Transport trolley model 6-2/1, 10-2/1 - Combi-Duo



Dimensions and weights

Width (W):	774 mm
Height (H):	1.358 mm
Depth (D):	979 mm
Weight:	34,7 kg

Material

Rust-free stainless steel (CNS 1.4301/AISI 304)

Note

- Only in combination with Combi-Duo run-in rail

Approvals



Datasheets

Transport trolley model 6-2/1, 10-2/1 - Combi-Duo

