

MI 90 SERIES 800MM WIDE GAS 4 BURNER GAS OVEN RANGE



DIMENSIONS (mm)

800W X 920D X 900H

TECHNICAL DATA

Gas Type	Natural or Propane
Total Output (Gas)	Natural - 181.5 MJ/h Propane - 170.8 MJ/h
Burners	4 x 37.5 MJ/h
Internal Oven Dimensions (mm):	570W X 490D X 295H
Oven Capacity:	3 X GN 2/1
Oven Power (Gas):	Natural - 31.5 MJ/h Propane - 28.8 MJ/h
Oven Temp. Range (°C):	0 - 300
AGA Approval Number	7410

SHIPPING DATA

Net Weight (kg):	150
Shipping Weight:	TBA
Shipping Dimensions:	TBA

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.


Freestanding gas cook top on gas oven in AISI 304 stainless steel. 2 mm pressed steel top with anti-spill front edge, designed for flush alignment with hermetic seal supplied for leak proofness. Top designed to accommodate water column accessory. Appliance comprising 4 main 37.5 MJ/h burners hermetically sealed to the top, 2 of which with maximum output of 6 kW and 2 with output of 10 kW. Ergonomic knobs shaped to prevent water infiltration. Output control from 1.6 to 6 kW and from 2.5 to 10 kW respectively by means of a valve with safety thermocouple. Main burner ignition by means of permanent low-energy pilot burner (170 W). Pilot burner and thermocouple are located underneath the main burner body, protected from accidental impact and spills. Boiling top with heavy duty pan stands in RAAF enamelled cast-iron (acid, alkali and flame resistant); the pan stands are compatible with both small and large pans. GN 2/1 gas oven with thermostatic control valve providing temperature adjustment from 50°C to 300°C. Stabilised flame burner complete with pilot flame with piezoelectric ignition and safety thermocouple. Stainless steel oven chamber, dimensions 575x700x300h mm. Heavy gauge enamelled steel oven bottom. Pressed stainless steel oven inner door with labyrinth seal. Appliance equipped with stainless steel adjustable feet.

STANDARD FEATURES

- 2mm thick pressed stainless top
- Modular design
- Enhanced Mareno knob with indicator lights to inform user of machine operating status
- NEW interlocking device & seal supplied with all units
- Space at rear for connection

OPTIONAL FEATURES

- Castor kit

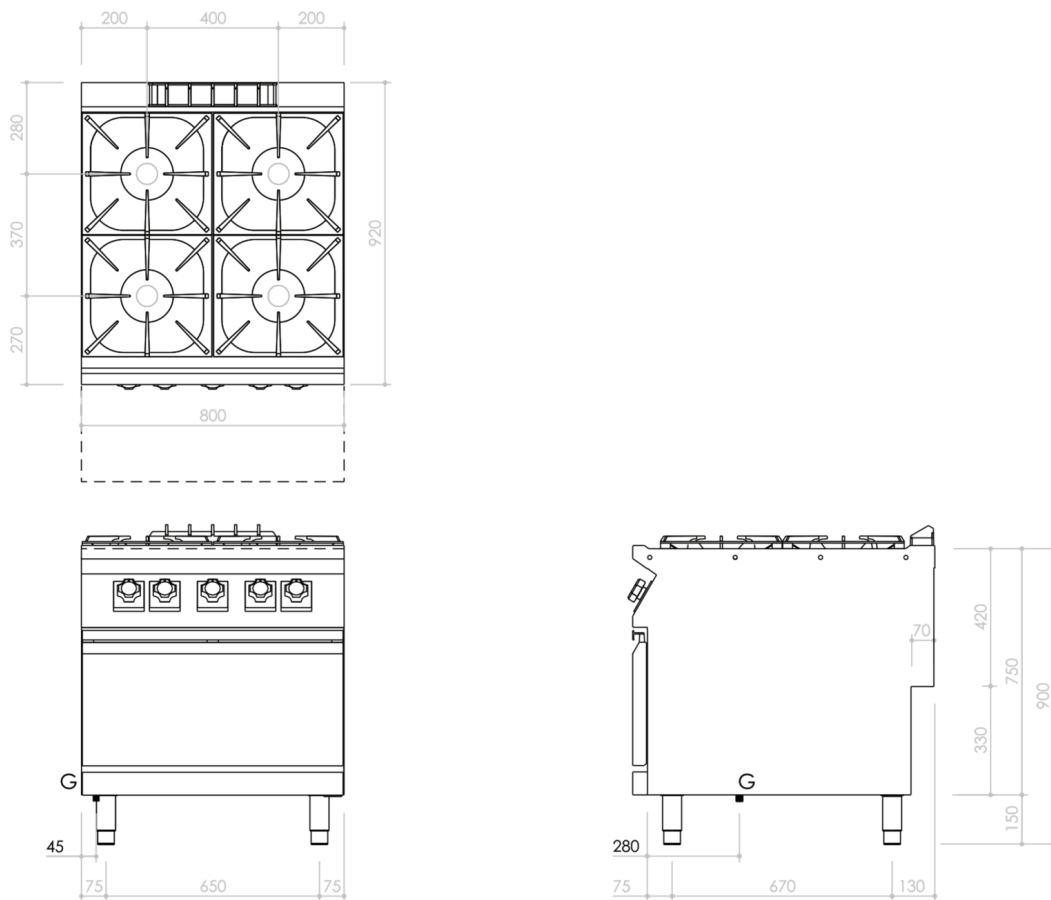

Disclaimer: The images and line drawings provided are for reference only and may not exactly match the specifications of the equipment.

INSTALLATION SPECIFICATIONS

(G) Gas Connection: $\varnothing 1/2"$