

6225/6225A

SOFT SERVE FREEZER

Two Flavor, Countertop, Digital Control
A: Pump Feed Model



Simple But Powerful

Classy design that offers quality and simplicity

Fast Freeze Down

Patented high efficiency heat exchanger allows fast freeze down with low energy consumption

Digital Control and Display

Microprocessor control provides access to system settings and additional functions. Digital interface displays critical info as system status, temperatures, dispense count, errors, etc.

Low Mix Indicator

Light turns "ON" at low mix to alert operator to add mix

Self Closing Dispensing Valve

Automatically prevents product overflow after dispense

Dispense Speed Control

Provides flexibility in dispense rate control for different applications

Ideal for medium capacity outlets to add soft serve ice cream and frozen yogurt. Low profile design keeps operation simple and helps reduce cost of ownership.



Standby

Maintains product temperature in both mix hopper and freezing cylinder below 4.4°C (40°F) overnight



Safety Protections

- Low temperature and motor overload shutoffs to protect in the event of cylinder freeze up
- High pressure switch to prevent compressor overheating
- Thermal overload to protect from motor overheating



6225 / 6225A

SOFT SERVE FREEZER

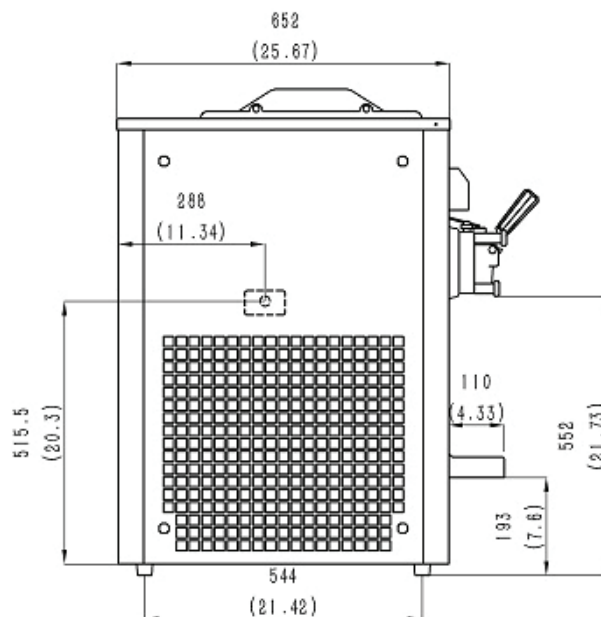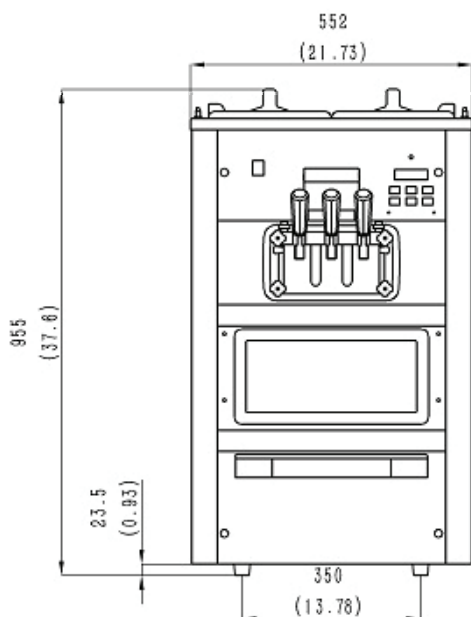

SPECIFICATIONS

Flavors	2 + Twist
Freezing Cylinders	2 x 1.7L / 1.8qt
Mix Hoppers	2 x 12L / 12.7qt
Output Capacity (80 grams)	300 serves/hr
Clearance Requirements	152mm/6" on left

Weight	Kg/lb (Gravity)	Kg/lb (Pump)
Net	155 / 344	165 / 367
Shipping Cylinders	170 / 378	180 / 400
Volume	0.57 CBM / 19.97 CBF	

Dimensions	Net (mm/in)	Shipping (mm/in)
Width	552 / 21.7	620 / 24.4
Depth	652 / 25.7	800 / 31.5
Height	955 / 37.6	1140 / 44.9

Electrical	Fuse	Amp	Power(kW)
220-240/50/1	25	15	2.9
208-230/60/1	25	16	3.2

FEATURES

Control System	Single, Digital
Refrigerated Hopper	✓
Hopper Agitator	✓
Temperature Display	✓
Standby Mode	✓
Auto CISOING Dispensing Valve	✓
Dispensing Speed Control	✓
Low Mix Indicator Light & Alarm	✓
Low Amperage Protection	✓
Motor Overload Protection	✓
High Pressure Protection	✓
Thermal Overload Protection	✓

AVAILABLE OPTIONS

Water Cooled	✓
Top Air Discharge Chute	✓

• Above specifications are subject to change without notice