

6240/6240A

SOFT SERVE FREEZER

Two Flavor, Floor, Digital Control
A: Pump Feed Model



Simple and Powerful

Classy design that offers quality and simplicity

Fast Freeze Down

Patented high efficiency heat exchanger allows fast freeze down with low energy consumption

Digital Control and Display

Microprocessor control provides access to system settings and additional functions. Digital interface displays critical info as system status, temperatures, dispense count, errors, etc.

Low Mix Indicator

Light turns "ON" at low mix to alert operator to add mix

Self Closing Dispensing Valve

Automatically prevents product overflow after dispense

Dispense Speed Control

Provides flexibility in dispense rate control for different applications

Standby

Maintains product temperature in both mix hopper and freezing cylinder below 4.4°C (40°F) overnight

Safety Protections



- Low temperature and motor overload shutoffs to protect in the event of cylinder freeze up
- High pressure switch to prevent compressor overheating
- Thermal overload to protect from motor overheating

Ideal for any high capacity outlets to serve soft ice cream, frozen yogurt, gelato or sorbet. Fully loaded with all standard options.



6240 / 6240A

SOFT SERVE FREEZER

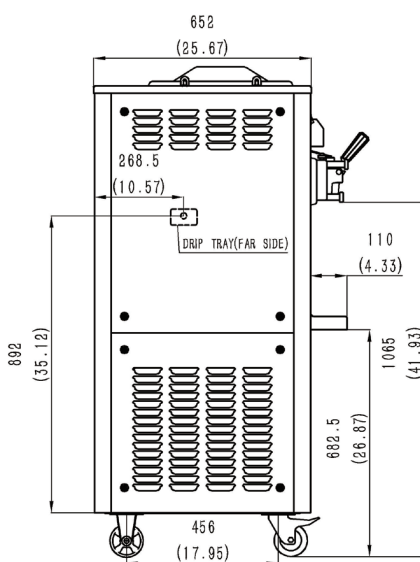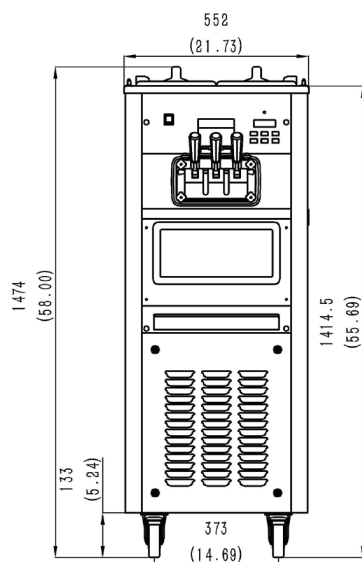

SPECIFICATIONS

Flavors	2 + Twist
Freezing Cylinders	2 x 1.7L / 1.8qt
Mix Hoppers	2 x 12L / 12.7qt (8L for A)
Output Capacity (80 grams)	400 serves/hr
Clearance Requirements	152mm/6" on back

Weight	Kg/lb (Gravity)	Kg/lb (Pump)
Net	165 / 364	175 / 386
Shipping Cylinders	180 / 397	190 / 419
Volume	0.87 CBM / 30.7 CBF	

Dimensions	Net (mm/in)	Shipping (mm/in)
Width	552 / 21.7	650 / 25.6
Depth	692 / 25.7	820 / 32.3
Height	1474 / 58.0	1640 / 64.6

Electrical	Fuse	Amps	Power(kW)
220-240/50/1	25	15	2.9
208-230/60/1	25	16	3.2

FEATURES

Control System	Single, Digital
Refrigerated Hopper	✓
Hopper Agitator	✓
Temperature Display	✓
Standby Mode	✓
Auto CISOING Dispensing Valve	✓
Dispensing Speed Control	✓
Low Mix Indicator Light & Alarm	✓
Low Temperature Protection	✓
Motor Amperage Protection	✓
High Pressure Protection	✓
Thermal Overload Protection	✓

AVAILABLE OPTIONS

Water Cooled	✓
Top Air Discharge Chute	✓

• Above specifications are subject to change without notice